

ECO-AD

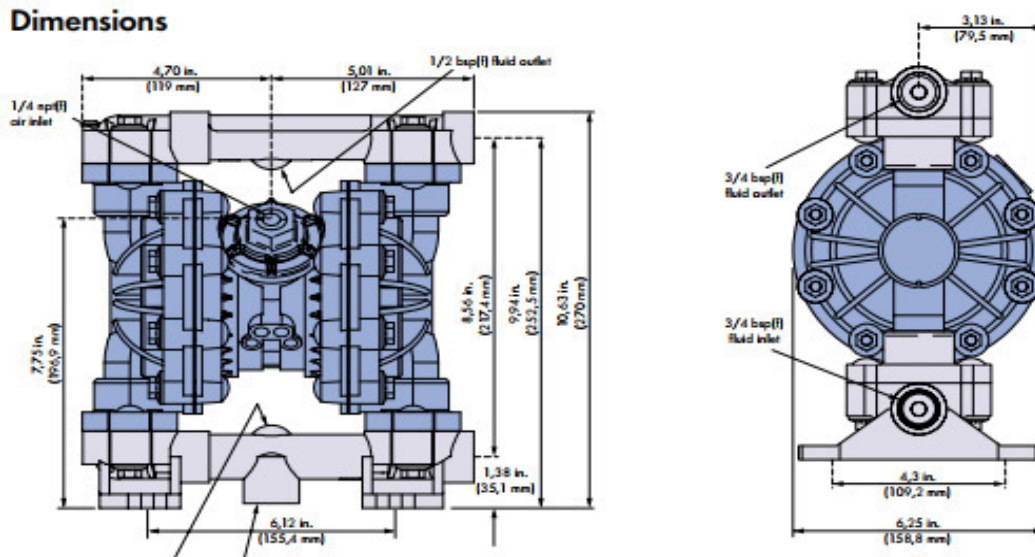
EA15/20 Metallic

The advantages of ECO-AD pumps:

- easy installation
- screwed chambers for safe operation
- rugged, cast feed mounting holes keep your pump from vibrating
- available as cover-mounted, pail-mounted or wall-mounted units
- immersible in most situations
- easy to adapt
- a large scale of material options for fluid versatility with extended pump life
- air powered convenience for use in a variety of installations with no electrical hazard
- performs on-demand in remote locations
- extremely portable for multi-location use
- pumps move a wide variety of coatings, solvents, viscosity sealants, adhesives, inks, acids and more
- easy to maintain
- seal-less, leakproof design prevents fluid waste and mess
- even in wet air, the stainless steel diaphragm rod air motor is designed for long life and corrosion resistance
- easy to operate
- pumps reduce or eliminate manual filling and transport
- reduces the risk of hazardous spills and employee exposure
- multiple dispense points throughout your plant can easily be served.
- can run dry without pump damage
- no air lubrication necessary.



EA	50	PP	PP	TF	TF
ECO-AD	Size	Body	Seats	Balls	Diaphragms
Connection	Material	Material	Material	Material	Material
8: 1/4"	AC:Acetal	AC:Acetal	AC:Acetal	AC:Acetal	VT:Viton
10: 3/8"	PP:Polypropylene	PP:Polypropylene	PP:Polypropylene	SP:Santoprene	SP:Santoprene
15: 1/2"	KY:Kynar (PVDF)	HY:Hytrek	HY:Hytrek	GE:Geolast	GE:Geolast
20: 3/4"	SS:SS 316	KY:PVDF	KY:PVDF	BN:Buna-N	BN:Buna-N
25: 1"	CI:Cast Iron	SS:SS 316	SS:SS 316	VT:Viton	TF: Teflon
40: 1 1/2"	AL: Alu	HS: Hard Steel	HS: Hard Steel	TF:Teflon	HY: Hytrek
50: 2"		SP: Santoprene	SP: Santoprene	SS:SS 316	
80: 3"		VT:Viton	VT:Viton	HS: Hard Steel	
		GE:Geolast	GE:Geolast		
		BN: Buna-N	BN: Buna-N		

ECO-AD**EA15/20 Metalic****Dimensions**

EA15/20 Metal Pumps	Aluminum	Stainless Steel
Maximum fluid working pressure	100 psi (7 bar, 0.7 MPa)	100 psi (7 bar, 0.7 MPa)
Maximum free flow delivery*	15 gpm (57 lpm)	15 gpm (57 lpm)
Maximum pump speed	400 cpm	400 cpm
Displacement per cycle**	0.04 gallon (0.15 liter)	0.04 gallon (0.15 liter)
Maximum suction lift	15 ft (4.5 m) dry	15 ft (4.5 m) dry
Maximum size pumpable solids	0.09 in (2.5 mm)	0.09 in (2.5 mm)
Maximum ambient operating temperature***	180°F (82°C)	180°F (82°C)
Typical sound level at 70 psi air (4.9 bar, 0.49 MPa) air @ 200 cpm	74 dBA	74 dBA
Maximum air consumption	28 scfm (0.672 m3/min)	28 scfm (0.672 m3/min)
Air pressure operating range	30 to 100 psi (2.1 to 7 bar, 0.21 to 0.7 MPa)	30 to 100 psi (2.1 to 7 bar, 0.21 to 0.7 MPa)
Air inlet size	1/4 npt(f)	1/4 npt(f)
Air exhaust port size	3/8 npt(f)	3/8 npt(f)
Fluid inlet & outlet size	1/2 or 3/4 npt(f) or bspt(f)	1/2 or 3/4 npt(f) or bspt(f)
Weight	8.5 lb (3.9 kg)	18 lb (8.2 kg)

Flow range